



SEMINAR ABSTRACT ARGUMENTATION

Implementing Abstract Argumentation Frameworks

Sarah Gaggl

Dresden, 22th November 2013

Outline

- Direct- vs. Reduction-based Approach
- Propositional Logic
- Answer-Set Programming
- ASP Encodings of AF Semantics
- Students' Topics

Motivation

- **Argumentation Frameworks** provide a formalism for a compact **representation** and **evaluation** of such scenarios.
- More complex semantics, especially in combination with an increasing amount of data, requires an **automated computation** of such solutions.
- Most of these problems are **intractable**, so implementing dedicated systems from the scratch is not the best idea.
- Distinction between **direct implementation** and **reduction-based approach**.
- We focus on reductions to **propositional logic** and **Answer-Set Programming (ASP)**.

The rapid implementation approach (RIA)

We know:

- Any complete problem can be translated into any other complete problem of the same complexity class
- Moreover, there exists poly-time translations (reductions)
- Complexity results (incl. completeness) for many reasoning tasks

We used already:

- e.g., the PTIME reduction from a CNF φ to an AF $F(\varphi)$ such that φ is satisfiable iff $F(\varphi)$ has an admissible set containing φ
- Can we “reverse” the reduction, i.e., from AFs to formulas?
- YES! Reduce to formalisms for which “good” solvers are available
☞ But we have to find the PTIME reduction!

The rapid implementation approach (2)

- Reduce reasoning tasks for AF, e.g., to SAT problems of (Q)BFs
- Reductions are “cheap” (wrt runtime and implementation effort!)
- Good SAT and QSAT solvers are available; simply use them

Benefits:

- Reductions are much easier to implement than full-fledged algorithms especially for “hard” reasoning tasks
- Basic reductions can be combined and reused
- Different formalisms can be reduced to same target formalism
 - ➔ beneficial for comparative studies

The rapid implementation approach (3)

Target formalisms are:

- The SAT problem for propositional formulas
- The SAT problem for quantified Boolean formulas
- Answer-set programs

Tools are available to solve all these three formalisms

Many developers are happy to give away their tool

They work hard to improve the tool's performance (for you!)

Required properties of reductions:

Faithfulness

- Let Π be a decision problem
- $F_{\Pi}(\cdot)$ a reduction to a target formalism
- $F_{\Pi}(\cdot)$ has to satisfy the following three conditions:
 - 1 $F_{\Pi}(\cdot)$ is **faithful**, i.e., $F_{\Pi}(K)$ is true iff K is a yes-instance of Π
 - 2 For each instance K , $F_{\Pi}(K)$ is poly-time computable wrt size of K
 - 3 Determining the truth of $F_{\Pi}(K)$ is computationally not harder than deciding Π

Faithfulness guarantees a correct “simulation” of K

Reductions to Propositional Logic

Given an AF $F = (A, R)$, for each $a \in A$ a propositional variable v_a is constructed.

- $S \subseteq A$ is a σ extension of F iff $\{v_a \mid a \in S\} \models \varphi$,
- with φ a propositional formula that evaluates F under semantics σ .

Admissible Sets

$$adm_{A,R} := \bigwedge_{a \in A} ((v_a \rightarrow \bigwedge_{(b,a) \in R} \neg v_b) \wedge (v_a \rightarrow \bigwedge_{(b,a) \in R} (\bigvee_{(c,b) \in R} v_c)))$$


Models of $adm_{A,R}$ correspond to admissible sets of F [Besnard & Doutre 04].

Reductions to Propositional Logic ctd.

Admissible Sets

$$adm_{A,R} := \bigwedge_{a \in A} ((v_a \rightarrow \bigwedge_{(b,a) \in R} \neg v_b) \wedge (v_a \rightarrow \bigwedge_{(b,a) \in R} (\bigvee_{(c,b) \in R} v_c)))$$

Example



$$adm_{A,R} = ((v_a \rightarrow \top) \wedge (v_b \rightarrow (\neg v_a \wedge \neg v_c))) \wedge (v_c \rightarrow (\neg v_b \wedge \neg v_d)) \wedge (v_d \rightarrow \top) \wedge (v_e \rightarrow (\neg v_d \wedge \neg v_e)) \wedge ((v_a \rightarrow \top) \wedge (v_b \rightarrow (\perp \wedge (v_b \vee v_d)))) \wedge (v_c \rightarrow ((v_a \vee v_c) \wedge \perp)) \wedge (v_d \rightarrow \top) \wedge (v_e \rightarrow (\perp \wedge d))$$

Answer-Set Programming

ASP Syntax

A rule r is an expression of the form

$$a_1 \vee \cdots \vee a_n \leftarrow b_1, \dots, b_k, \text{ not } b_{k+1}, \dots, \text{ not } b_m,$$

with $n \geq 0, m \geq k \geq 0, n + m > 0$, where $a_1, \dots, a_n, b_1, \dots, b_m$ are atoms, and “not” stands for default negation.

We call

- $H(r) = \{a_1, \dots, a_n\}$ the head of r ;
- $B(r) = \{b_1, \dots, b_k, \text{ not } b_{k+1}, \dots, \text{ not } b_m\}$ the body of r ;
- $B^+(r) = \{b_1, \dots, b_k\}$ the positive body of r ;
- $B^-(r) = \{b_{k+1}, \dots, b_m\}$ the negative body of r .

ASP Semantics

- An interpretation I satisfies a ground rule r iff $H(r) \cap I \neq \emptyset$ whenever
 - $B^+(r) \subseteq I$,
 - $B^-(r) \cap I = \emptyset$.
- I satisfies a ground program π , if each $r \in \pi$ is satisfied by I .
- A non-ground rule r (resp., a program π) is satisfied by an interpretation I iff I satisfies all groundings of r (resp., $Gr(\pi)$).

Gelfond-Lifschitz reduct

An interpretation I is an **answer set** of π iff it is a subset-minimal set satisfying

$$\pi^I = \{H(r) \leftarrow B^+(r) \mid I \cap B^-(r) = \emptyset, r \in Gr(\pi)\}.$$

Corresponding Complexity Results

Complexity of Argumentation

	<i>adm</i>	<i>pref</i>	<i>semi</i>	<i>stage</i>	<i>grd*</i>
Cred	NP-c	NP-c	Σ_2^p -c	Σ_2^p -c	NP-c
Skept	(trivial)	Π_2^p -c	Π_2^p -c	Π_2^p -c	co-NP-c


[Baroni et al. 11; Dimopoulos & Torres 96; Dunne & Bench-Capon 02; Dvořák & Woltran 10]

Recall: Data-Complexity of Datalog

	normal programs	disjunctive program	optimization programs
\models_c	NP	Σ_2^p	Σ_2^p
\models_s	co-NP	Π_2^p	Π_2^p

[Dantsin, Eiter, Gottlob, Voronkov 01]

ASPARTIX - System Description

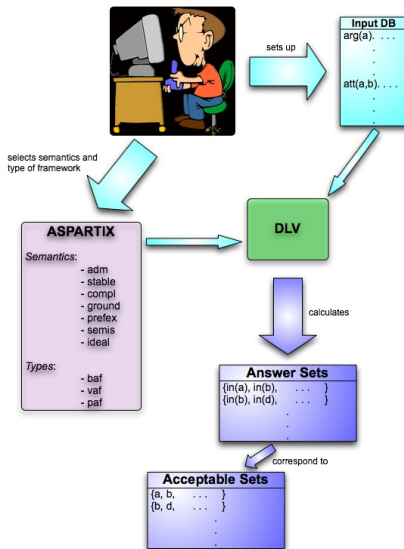

ASP Encodings

Conflict-free Set

Given an AF (A, R) .

A set $S \subseteq A$ is **conflict-free** in F , if, for each $a, b \in S$, $(a, b) \notin R$.

Encoding for $F = (A, R)$

$$\widehat{F} = \{\text{arg}(a) \mid a \in A\} \cup \{\text{att}(a, b) \mid (a, b) \in R\}$$

$$\pi_{cf} = \left\{ \begin{array}{ll} \text{in}(X) & \leftarrow \text{not out}(X), \text{arg}(X) \\ \text{out}(X) & \leftarrow \text{not in}(X), \text{arg}(X) \\ & \leftarrow \text{in}(X), \text{in}(Y), \text{att}(X, Y) \end{array} \right\}$$

Result: For each AF F , $cf(F) \equiv \mathcal{AS}(\pi_{cf}(\widehat{F}))$

ASP Encodings cont.

Admissible Sets

Given an AF $F = (A, R)$. A set $S \subseteq A$ is **admissible** in F , if

- S is conflict-free in F
- each $a \in S$ is **defended** by S in F
 - $a \in A$ is defended by S in F , if for each $b \in A$ with $(b, a) \in R$, there exists a $c \in S$, such that $(c, b) \in R$.

Encoding

$$\pi_{adm} = \pi_{cf} \cup \left\{ \begin{array}{l} \text{defeated}(X) \leftarrow \text{in}(Y), \text{att}(Y, X) \\ \leftarrow \text{in}(X), \text{att}(Y, X), \text{not defeated}(Y) \end{array} \right\}$$

Result: For each AF F , $adm(F) \equiv \mathcal{AS}(\pi_{adm}(\widehat{F}))$

ASP Encodings ctd.

Stable Extensions

Given an AF $F = (A, R)$. A set $S \subseteq A$ is a **stable extension** of F , if

- S is conflict-free in F
- for each $a \in A \setminus S$, there exists a $b \in S$, such that $(b, a) \in R$

Encoding

$$\pi_{stable} = \pi_{cf} \cup \left\{ \begin{array}{ll} \text{defeated}(X) & \leftarrow \text{in}(Y), \text{att}(Y, X) \\ & \leftarrow \text{out}(X), \text{not defeated}(X) \end{array} \right\}$$

Result: For each AF F , $stable(F) \equiv \mathcal{AS}(\pi_{stable}(\widehat{F}))$

ASP Encodings ctd.

Grounded Extension

Given an AF $F = (A, R)$. The characteristic function $\mathcal{F}_F : 2^A \rightarrow 2^A$ of F is defined as

$$\mathcal{F}_F(E) = \{x \in A \mid x \text{ is defended by } E\}.$$

The least fixed point of \mathcal{F}_F is the grounded extension.

Order over domain

$$\pi_{<} = \left\{ \begin{array}{ll} \text{lt}(X, Y) & \leftarrow \text{arg}(X), \text{arg}(Y), X < Y \\ \text{nsucc}(X, Z) & \leftarrow \text{lt}(X, Y), \text{lt}(Y, Z) \\ \text{succ}(X, Y) & \leftarrow \text{lt}(X, Y), \text{not nsucc}(X, Y) \\ \text{ninf}(X) & \leftarrow \text{lt}(Y, X) \\ \text{nsup}(X) & \leftarrow \text{lt}(X, Y) \\ \text{inf}(X) & \leftarrow \text{not ninf}(X), \text{arg}(X) \\ \text{sup}(X) & \leftarrow \text{not nsup}(X), \text{arg}(X) \end{array} \right\}$$

ASP Encodings ctd.

Grounded Extension

Given an AF $F = (A, R)$. The characteristic function $\mathcal{F}_F : 2^A \rightarrow 2^A$ of F is defined as

$$\mathcal{F}_F(E) = \{x \in A \mid x \text{ is defended by } E\}.$$

The least fixed point of \mathcal{F}_F is the grounded extension.

Encodings Grounded Extension

$$\pi_{ground} = \left\{ \begin{array}{ll} \text{def_upto}(X, Y) & \leftarrow \text{inf}(Y), \text{arg}(X), \text{not att}(Y, X) \\ \text{def_upto}(X, Y) & \leftarrow \text{inf}(Y), \text{in}(Z), \text{att}(Z, Y), \text{att}(Y, X) \\ \text{def_upto}(X, Y) & \leftarrow \text{succ}(Z, Y), \text{def_upto}(X, Z), \text{not att}(Y, X) \\ \text{def_upto}(X, Y) & \leftarrow \text{succ}(Z, Y), \text{def_upto}(X, Z), \text{in}(V), \\ & \text{att}(V, Y), \text{att}(Y, X) \\ \text{defended}(X) & \leftarrow \text{sup}(Y), \text{def_upto}(X, Y) \\ \text{in}(X) & \leftarrow \text{defended}(X) \end{array} \right\}$$

Result: For each AF F , $\text{ground}(F) \equiv \mathcal{AS}(\pi_{ground}(\widehat{F}))$

ASP Encodings

Preferred Extensions

Given an AF $F = (A, R)$. A set $S \subseteq A$ is a preferred extension of F , if

- S is admissible in F
- for each $T \subseteq A$ admissible in F , $S \not\subseteq T$

Encoding

- Preferred semantics needs **subset maximization** task.
- Can be encoded in standard ASP but requires **insight** and **expertise**.

Saturation Encodings

Preferred Extension

Given an AF (A, R) . A set $S \subseteq A$ is **preferred** in F , if S is admissible in F and for each $T \subseteq A$ admissible in T , $S \not\subseteq T$.

Encoding

$$\pi_{\text{sat}} = \left\{ \begin{array}{ll} \text{inN}(X) \vee \text{outN}(X) & \leftarrow \text{out}(X); \\ \text{inN}(X) & \leftarrow \text{in}(X) \\ \text{fail} & \leftarrow \text{eq} \\ \text{fail} & \leftarrow \text{inN}(X), \text{inN}(Y), \text{att}(X, Y) \\ \text{fail} & \leftarrow \text{inN}(X), \text{outN}(Y), \text{att}(Y, X), \\ & \text{undefeated}(Y) \\ \text{inN}(X) & \leftarrow \text{fail}, \text{arg}(X) \\ \text{outN}(X) & \leftarrow \text{fail}, \text{arg}(X) \\ & \leftarrow \text{not fail} \end{array} \right\}$$
$$\pi_{\text{pref}} = \pi_{\text{adm}} \cup \pi_{\text{helpers}} \cup \pi_{\text{sat}}$$

Result: For each AF F , $\text{pref}(F) \equiv \mathcal{AS}(\pi_{\text{pref}}(\hat{F}))$

Metasp [Gebser et al., 2011]

- Recently proposed `metasp` front-end for the `gringo/claspD` package.
- The problem encoding is first grounded with the `reify` option, which outputs ground program as facts.
- Next the meta encodings mirror answer-set generation.
- Meta encodings also implement `subset minimization` for the `#minimize-statement`.



Metasp Encoding

- Together with the module admissibility, the remaining encoding for subset maximization reduces to

Preferred Extensions

$$\pi_{adm} \cup \{\#minimize[out(X)]\}.$$

- This relocates the optimization encoding to the [meta-encodings](#).
- Enables simple encodings and performs surprisingly well.

Additional info on encodings and extensions

ASPARTIX (ASP Argumentation Reasoning Tool)

- Encodings are used together with an ASP-solver, like clasp or dlv
- Implements all prominent argumentation semantics
- Even for extended frameworks like PAFs, VAFs, BAPs, ...
- Easy to use
- Web-interface available:

<http://rull.dbai.tuwien.ac.at:8080/ASPARTIX/>

Info and encodings are available under:

<http://www.dbai.tuwien.ac.at/research/project/argumentation/>

Related work

Other encodings

- by [Nieves et al., 2008] and follow-up papers; mostly a new program has to be constructed for each instance
- Related approaches: reductions to SAT/QSAT [Besnard and Doutre, 2004, Egly and Woltran, 2006]
- DIAMOND (DIAlectical MOdels eNcoDing) is a software system to compute different ADF models (see <https://isysrv.informatik.uni-leipzig.de/diamond>)
- ConArg is a tool, based on Constraint Programming [Bistarelli and Santini, 2012] (see <https://sites.google.com/site/santinifrancesco/tools>)

Other systems

- Collection:
<http://wyner.info/LanguageLogicLawSoftware/index.php/software/>
- System Demos at COMMA 2012:
<http://www.kr.tuwien.ac.at/events/comma2012/accepted.php#demos>

Students' Topics

- Abstract Dialectical Frameworks (ADFs),
- Instantiations,
- Dynamics in argumentation,
- Loops in argumentation frameworks,
- Argumentation and Answer-Set Programming (ASP),
- Equivalences in AFs,
- SAT-Procedures for AFs,
- Computational Complexity of AFs,
- Social Choice and Argumentation,
- Argumentation and the Semantic Web,
- Argumentation and Game Theory

Presentations and Invited Talk

Presentations

- 20 min presentation plus 10 min discussion
- send slides 2 weeks before presentation date to sarah.gaggl@tu-dresden.de
- [check your paper after assignment!](#)
- date for presentations: 17th and 18th January 2014

Invited Talk

- Stefan Woltran will give a talk probably on 15th January 2014
- participants of seminar should join the talk



Philippe Besnard and Sylvie Doutre.

Checking the acceptability of a set of arguments.

In Proceedings of the 10th International Workshop on Non-Monotonic Reasoning (NMR'02), pages 59–64, 2004.



S. Bistarelli, F. Santini, Conarg: a tool to solve (weighted) abstract argumentation frameworks with (soft) constraints, CoRR abs/1212.2857.



Dung, P. M. (1995).

On the acceptability of arguments and its fundamental role in nonmonotonic reasoning, logic programming and n-person games.

Artif. Intell., 77(2):321–358.



Dvořák, W., Gaggl, S. A., Wallner, J., and Woltran, S. (2011).

Making use of advances in answer-set programming for abstract argumentation systems.



Uwe Egly and Stefan Woltran.

Reasoning in argumentation frameworks using quantified boolean formulas.

In Proceedings of the 1st Conference on Computational Models of Argument (COMMA'06), pages 133–144. IOS Press, 2006.



Uwe Egly, Sarah Gaggl, and Stefan Woltran.

Answer-set programming encodings for argumentation frameworks.

In Argument and Computation, 1(2):147–177, 2010.



Gebser, M., Kaminski, R., and Schaub, T. (2011).

Complex optimization in answer set programming.

TPLP, 11(4-5):821–839.



Juan Carlos Nieves, Mauricio Osorio, and Ulises Cortés.

Preferred extensions as stable models.

Theory and Practice of Logic Programming, 8(4):527–543, July 2008.